

PAM-7Q


Standard Professional Automotive

POSITIONING

u-blox 7 GPS antenna module

Highlights

- Embedded GPS antenna
- Excellent antenna performance
- Low power consumption
- Form-factor compatible with UP501
- Easy integration into design

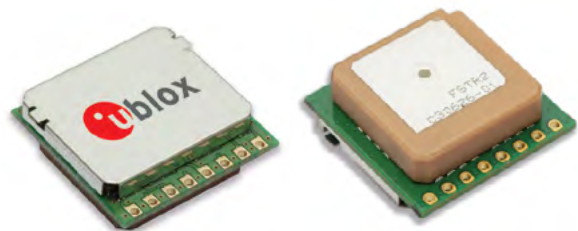

Bottom view
(shield side)

Top view
(patch antenna side)

PAM-7Q:
22.0 x 22.0 x 8.0 mm

Product description

The u-blox PAM-7Q patch antenna module has the exceptional performance of the u-blox 7 GNSS engine and delivers high sensitivity and minimal acquisition times in an industry proven form factor.

Incorporating the PAM-7Q into customer designs is simple and straightforward, thanks to the embedded antenna, low power consumption, simple interface, and sophisticated interference suppression that ensures maximum performance even in GPS-hostile environments.

The 18 x 18 mm patch antenna of PAM-7Q provides RHCP polarization, which is not achievable with smaller patch an-

tenna elements. The simple design and easy interfacing keeps installation costs to a minimum.

PAM-7Q targets industrial and consumer applications that require small and cost efficient smart antenna solutions. It is form factor compatible with UP501 module, allowing the upgrade of existing designs with minimal effort.

PAM-7Q modules use GPS chips qualified according to AEC-Q100 and are manufactured in ISO/TS 16949 certified sites. Qualification tests are performed as stipulated in the ISO16750 standard: "Road vehicles – Environmental conditions and testing for electrical and electronic equipment".

Product selector

Model	Type	Supply	Interfaces	Features	Grade
PAM-7Q	<ul style="list-style-type: none"> • GPS / QZSS • GLONASS • Galileo • BeiDou • Timing • Dead Reckoning • Precise Point Positioning • Raw Data 	<ul style="list-style-type: none"> • 2.7 V – 3.6 V • Lowest power (DC/DC) 	<ul style="list-style-type: none"> • UART • USB • SPI • DDC (I²C compliant) 	<ul style="list-style-type: none"> • Programmable (Flash) • Data logger • Additional SAW • Additional LNA • RTC crystal • Internal oscillator • Active antenna / LNA supply • Active antenna / LNA control • Antenna short circuit detection / protection pin • Antenna open circuit detection pin • Frequency output 	<ul style="list-style-type: none"> • Standard • Professional • Automotive

T = TCXO

Features

Receiver type	56-channel u-blox 7 engine GPS/ QZSS L1 C/A SBAS: WAAS, EGNOS, MSAS	
Navigation update rate	up to 10 Hz	
Accuracy	Position	2.5 m CEP
	SBAS	2.0 m CEP
Acquisition	Cold starts:	29 s
	Aided starts:	5 s
	Reacquisition:	1 s
Sensitivity	Tracking & Nav:	-161 dBm
	Cold starts:	-147 dBm
	Warm starts:	-147 dBm
Assistance GPS	AssistNow Online AssistNow Offline AssistNow Autonomous OMA SUPL & 3GPP compliant	
Oscillator	TCXO	
RTC crystal	Built-In	
Anti jamming	Active CW detection and removal, onboard SAW band pass filter	
Memory	Onboard ROM	

Electrical data

Supply voltage	2.7 V to 3.6 V
Digital I/O voltage level	2.7 V to 3.6 V
Power Consumption	22 mA @ 3 V (Continuous)
Backup Supply	1.4 V to 3.6 V

Interfaces

Serial interfaces	1 UART, 1 DDC (I ² C compliant)
Digital I/O	Configurable timepulse
Timepulse	Configurable 0.25 Hz to 10 MHz
Protocols	NMEA, UBX binary, RTCM

Legal Notice

u-blox reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. Reproduction, use, modification or disclosure to third parties of this document or any part thereof without the express permission of u-blox is strictly prohibited.


The information contained herein is provided "as is" and u-blox assumes no liability for the use of the information. No warranty, either express or implied, is given, including but not limited, with respect to the accuracy, correctness, reliability and fitness for a particular purpose of the information. This document may be revised by u-blox at any time. For most recent documents, visit www.u-blox.com.

Copyright © 2015, u-blox AG

Package

8 pin contact header: 22 x 22 x 8 mm, 9 g

Pinout



Environmental data, quality & reliability

Operating temp. -40° C to 85° C

Storage temp. -40° C to 85° C

RoHS compliant (lead-free)

Qualification according to ISO16750

Manufactured in ISO/TS 16949 certified production site

Uses u-blox 7 chips qualified according to AEC-Q100

Support products

u-blox 7 Evaluation Kits:

Easy-to-use kits to get familiar with u-blox 7 positioning technology, evaluate functionality, and visualize GPS performance.

EVK-7PAM: u-blox 7 GPS Evaluation Kit, supports PAM-7Q

Product variants

PAM-7Q u-blox GPS Antenna Module, TCXO, SAW, LNA

Further information

For contact information, see www.u-blox.com/contact-us.

For more product details and ordering information, see the product data sheet.