


SARA-U201 module



HSPA module with 2G fallback

The world's smallest global HSPA/GSM modules

- Versatile 3G product with many configuration options
- Automotive-grade and ATEX-certified options available
- Easy migration between u-blox 2G, 3G and 4G modules
- Supports eCall, ERA GLONASS, CellLocate® indoor positioning, and GNSS / A-GNSS integration
- Extended temperature range of -40 °C to +85 °C

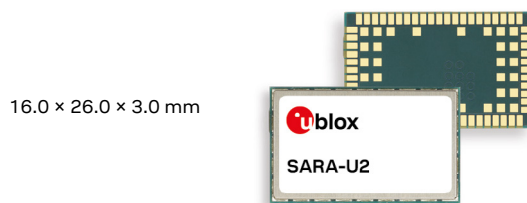

SARA-U201^A

Product description

The SARA-U201 UMTS/HSPA module provides efficient and cost-effective high-speed mobile connectivity in an ultra-small LGA form factor. The SARA-U201 offers seamless drop-in migration from GSM (SARA-G3 modules) and CDMA (LISA-C modules) as well as easy migration to LTE (TOBY-L / TOBY-R / LARA-R modules).

SARA-U201 features HSPA data-rates of 7.2 Mbit/s (downlink) and 5.76 Mbit/s (uplink). The module has an extended operating temperature range of -40°C to +85°C, low power consumption, and a rich feature set including dual-stack IPv4 / IPv6.

SARA-U201 is ideal for a wide range of industrial and consumer applications, such as connected navigation systems, mobile-internet devices, security and surveillance systems, eCall, fleet management, metering, anti-theft systems, and other automotive applications.

The SARA-U201 module provides a fully integrated interface to u-blox satellite positioning chips and modules to support telematics applications.

An extensive set of national regulatory and operator certificates is available. RIL software for Android is available free of charge.

SARA-U201 is manufactured in ISO/TS 16949 certified sites. Each module is tested and inspected during production. The modules are qualified according to ISO 16750 – Environmental conditions and electrical testing for electrical and electronic equipment for road vehicles.

Grade	
Automotive	•
Professional	•
Standard	
Regions	
	Global
Access Technology	
GSM/GPRS bands	Q
UMTS/HSPA [MHz]	800, 850, 900, 1900, 2100
Data rate	M
Positioning	
GNSS via modem §	•
AssistNow Software	•
CellLocate®	•
eCall / ERA GLONASS	•
Interfaces	
UART	2
USB	1
DDC for u-blox GNSS	1
GPIO	9
Audio	
Digital audio	1
Features	
Antenna detection	•
Jamming detection	•
Embedded TCP/UDP	•
Embedded FTP/HTTP	•
Embedded SSL	•
FW update via serial	•
FOTA	•
Dual stack IPv4/IPv6	•

M = 7.2 / 5.76 Mb/s down/up
Q = Quad-band

A = ATEX variant available
§ = external GNSS can be controlled via the modem

SARA-U201 module



Features

UMTS/HSPA	800/850/900/1900/2100 MHz 3GPP Release 7 5.76 Mbit/s uplink, 7.2 Mbit/s downlink
GSM	Quad-band, 850/1900, 900/1800 MHz
GPRS	Class 12, CS1-CS4, up to 85.6 kbit/s
EDGE	Class 12, MCS1-9, up to 236.8 kbit/s
CSD	GSM max 9.6 kbit/s UMTS max 64 kbit/s
SMS	MT/MO PDU / Text mode
Voice	HR/FR/EFR/AMR/AMR-WB Echo cancellation and noise reduction

Software features

Protocols	Dual stack IPv4/IPv6 Embedded TCP/IP, UDP/IP HTTP/FTP/SSL (Secure Socket Layer) SSL TLS 1.2 (for embedded TCP/IP) Ethernet over USB eSIM and Bearer-Independent-Protocol
Network	Jamming detection
GNSS Interfaces	Direct access to u-blox GNSS via SARA AssistNow software for fastest GNSS Time-to-First-Fix CellLocate® & Hybrid Positioning
Emergency calling	E911 (USA) European eCall, eMLPP
Other	ODIS feature for AT&T Protect network from excessive signaling traffic Last gasp (for "04" versions onwards)
Firmware upgrade	Via UART and USB FOTA (Firmware upgrade over the air) client (for "04" versions onwards)

Interfaces

GPIO	9 GPIO, controllable via AT commands
(U)SIM	Supports 1.8 V and 3.0 V, SIM toolkit
Serial	2 UART for "04" versions onwards 1 UART for all other variant versions 1 USB 2.0 (high-speed, 480 Mbit/s) 1 DDC (I ² C) for GNSS and other I ² C slaves
Audio	1 digital

Package

96 pin LGA: 16.0 x 26.0 x 3.0 mm, < 3 g

Environmental data, quality & reliability

Operating temperature	-40 °C to +85 °C (extended range)
RoHS compliant (lead-free)	
Qualification according to ISO 16750	
Manufactured in ISO/TS 16949 certified production sites	
ATEX certification (SARA-U201 ATEX variant)	

Electrical data

Power supply	3.3 V to 4.4 V
Power consumption	Power off 65 µA Idle (2G) 0.9 mA Idle (3G) 0.9 mA GPRS 215 mA (850 MHz, 900 MHz) 140 mA (1800 MHz, 1900 MHz) HSDPA 580 mA HSPA 460 mA

Certifications and approvals

SARA-U201	ATEX, PTCRB, GCF, FCC (USA), ISED (Canada), RED (CE), RCM (Australia), SRRC/CCC (China), NCC (Taiwan), Giteki (Japan), Anatel (Brazil), AT&T, Rogers, NTT DoCoMo
-----------	--

Support products

EVK-U201SARA	Evaluation kit specifically for SARA-U201
RIL software	Android
USB driver	Embedded Windows 6.x, 7.x Windows XP, Vista, 7, 8, 10 Windows Mobile 6.5

Product variants

SARA-U201	HSPA/GSM for global coverage
SARA-U201 ATEX	HSPA/GSM for global coverage; ATEX

Further information

For contact information, see www.u-blox.com/contact-us.

For more product details and ordering information, see the [product data sheet](#).

Legal Notice:

u-blox reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. Reproduction, use, modification or disclosure to third parties of this document or any part thereof without the express permission of u-blox is strictly prohibited.

The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose or content of this document. This document may be revised by u-blox at any time. For most recent documents, please visit www.u-blox.com.
Copyright © 2020, u-blox AG