


JODY-W5 series



Host-based compact automotive modules

Automotive grade modules supporting Wi-Fi 6 dual-band 1x1 and dual-mode Bluetooth 5.4

- Two-wheel vehicle applications
- Electric vehicle charging
- Telematic control units and head units
- In-vehicle infotainment, such as rear-seat entertainment
- Demanding environments up to +105 °C
- State-of-the-art security and encryption

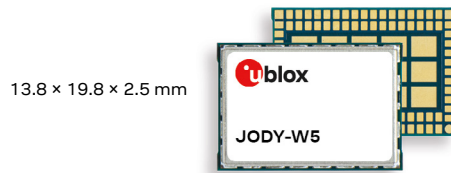

Product description

JODY-W5 host-based modules for automotive applications provide Wi-Fi 6 dual-band single-stream at up to 600 Mbit/s data rate and dual-mode Bluetooth 5.4 Classic and LE including isochronous channels for LE Audio at up to 3 Mbit/s (LE 2 Mbit/s). JODY-W5 modules require a host processor running Linux or Android. They connect to the host processor through various interfaces: SDIO for Wi-Fi, high speed UART for Bluetooth, and PCM or I2S for Bluetooth Classic audio. JODY-W5 has the established compact JODY footprint and pinout enabling easy migration, for instance from the JODY-W2 Wi-Fi 5 module.

JODY-W5 features two antenna pins (1 Wi-Fi, 1 Bluetooth), and is offered in automotive grade 3 with up to 85 °C and grade 2 with up to 105 °C operating temperature. It is certified by FCC, ISSED, RED and Bluetooth SIG (under development).

Other antenna configurations, LTE filters, and regional certifications can be offered based on market demand.

JODY-W5 modules are designed with the automotive qualified NXP AW611 chip. They undergo automotive qualification according to the u-blox qualification policy based on AEC-Q104 and are manufactured in line with ISO/TS 16949.

Key features

- Wi-Fi 6 (802.11ax) 2.4 and 5 GHz, 1x1 SISO
- Up to 480 Mbit/s throughput via SDIO 3.0
- Supporting MU-MIMO
- Wi-Fi 802.11d/e/h/i/k/r/u/v/w/mc/az
- Wi-Fi security: WPA3, WPA2, WAPI, AES
- Dual mode BT & BLE – Bluetooth 5.4
- BR/EDR 3Mbit/s; LE 2Mbit/s via High-Speed UART
- LE Long Range and LE Power Control
- Isochronous channels for LE Audio
- Coexistence management – internal (Wi-Fi / BT) and external via WCI-2 and PTA interfaces
- Secure boot and secure OTP
- Compact JODY form-factor 13.8 mm x 19.8 mm
- Automotive Grades 3 and 2, -40 °C to 85 / 105°C

	JODY-W562-00A	JODY-W562-01A	JODY-W562-21A
Grade			
Automotive	•	•	•
Professional			
Standard			
Radio			
Chip inside	NXP AW611		
Bluetooth qualification	v5.4		
Bluetooth profiles	HCI		
Bluetooth BR/EDR	•	•	•
Bluetooth Low Energy	•	•	•
Bluetooth output power conducted [dBm]	12	12	12
Wi-Fi output power conducted, 2 GHz [dBm]	20	20	20
Wi-Fi output power conducted, 5 GHz [dBm]	18	18	18
Wi-Fi IEEE 802.11 standards	Wi-Fi 6		
Wi-Fi channel width [MHz]	20, 40, 80		
LTE filter			•
Antenna type	2p	2p	2p
OS support			
Android / Linux drivers (from NXP)	•	•	•
Interfaces			
UART ^B	1	1	1
SDIO 3.0 ^W	1	1	1
PCM / I2S (Audio)	1	1	1
Features			
Temperature range up to [°C]	85	105	105
Micro Access Point [max connects]	16	16	16
Wi-Fi direct	•	•	•
WPA3	•	•	•
RF calibration in OTP	•	•	•
Programmed MAC address	•	•	•

B = For Bluetooth only 2p = 2 pins, 1 each for Wi-Fi and Bluetooth antenna
W = For Wi-Fi only

JODY-W5 series



Features

Wi-Fi standards	Wi-Fi 6 (802.11a/b/g/n/ac/ax) IEEE 802.11d/e/h/i/k/r/u/v/w/mc/az
Wi-Fi channels	2.4 GHz: 1-13 5 GHz: 36-177
Bluetooth	v5.4 (Bluetooth Low Energy and Bluetooth BR/EDR) Class 1 and 2 transmission Bluetooth Low Energy long range Bluetooth Low Energy Audio
Antenna	2 antenna pins
Wi-Fi TX power	18 dBm (Wi-Fi 6, 5 GHz, 20 MHz channel)
RX sensitivity	Wi-Fi 6 2.4 GHz: -91 dBm (indicative) Wi-Fi 6 5 GHz: -92.5 dBm (indicative) BT BDR: -96 dBm (indicative) BLE: -98 dBm (@ 1mbit/s, indicative)
Security	128-bit AES hardware encryption Secure boot

Software features

RF calibration	Available in on-board OTP memory
MAC addresses	Available in on-board OTP memory
Security	WPA2 (CCMP, AES) WPA3 WAPI
Wi-Fi op modes	Station (STA) Access Point (AP) Wi-Fi Direct P2P Combinations of STA, AP, P2P
Driver support	Free of charge drivers for Linux and Android RTOS (with NXP MCUXpresso)
Wi-Fi / Bluetooth coexistence	Internal co-existence mechanism, Central hardware packet traffic arbitration for external radio

Interfaces

Wi-Fi	SDIO 3.0 (4-bit, up to 208 MHz clock)
Bluetooth	High-speed UART, 4-wire PCM and I2S for Bluetooth audio
Coexistence	WCI-2 interface for external radio coexistence
Other interfaces	GPIOs

Package

Dimensions	13.8 × 19.8 × 2.5 mm
Mounting	Solder pins (LGA), 94 pins, additional large ground pins

Environmental data, quality, and reliability

Operating temperature	-40 °C to +85 °C / +105 °C
MSL-level	3
RoHS and REACH compliance	
Automotive qualification according to u-blox Qualification Policy based on AEC-Q104	

Electrical data

RF power supply	3.14 – 3.46 V DC
VIO power supply	3.3 V DC or 1.8 V DC

Certifications and approvals ¹

Type approvals	Europe (RED), US (FCC), Canada (ISED), Great Britain (UKCA) Taiwan, Korea, Australia, and Brazil upon demand
Bluetooth qualification ¹	v5.4 (Bluetooth BR/EDR and Bluetooth Low Qualification Energy)

¹ = Pending approvals

Support products

EVK-JODY-W562-00C	Evaluation kit for JODY-W562
-------------------	------------------------------

Product variants

JODY-W562-00A	Automotive grade 3 (-40 °C to +85 °C) module for Wi-Fi 6 / Bluetooth 5.4, under development
JODY-W562-01A	Automotive grade 2 (-40 °C to +105 °C) module for Wi-Fi 6 / Bluetooth 5.4, under development
JODY-W562-21A	Automotive grade 2 (-40 °C to +105 °C) module for Wi-Fi 6 / Bluetooth 5.4, LTE filter, under development

Further information

For contact information, see www.u-blox.com/contact-u-blox.

For more product details and ordering information, see the [product data sheet](#).

Legal Notice:

u-blox or third parties may hold intellectual property rights in the products, names, logos and designs included in this document. Copying, reproduction, or modification of this document or any part thereof is only permitted with the express written permission of u-blox. Disclosure to third parties is permitted for clearly public documents only.

The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose or content of this document. This document may be revised by u-blox at any time. For most recent documents, please visit www.u-blox.com.